

UTILITY PATENT APPLICATION TRANSMITTAL

(New Nonprovisional Applications Under 37 CFR § 1.53(b))

Attorney Docket No.
1018.051US1

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith is the patent application of () application identifier or (X) first named inventor, Nitin Vaidya, entitled Fair Scheduling in Broadcast Environments, for a(n):

(X) Original Patent Application.

() Continuing Application (prior application not abandoned):

() Continuation () Divisional () Continuation-in-part (CIP)

of prior application No: _____ Filed on: _____

() A statement claiming priority under 35 USC § 120 has been added to the specification.

Enclosed are:

(X) Specification; 25 Total Pages.(X) Drawing(s); 6 Total Sheets.

(X) Oath or Declaration:

(X) A Newly Executed Combined Declaration and Power of Attorney:

() Signed. (X) Unsigned. () Partially Signed.

() A Copy from a Prior Application for Continuation/Divisional (37 CFR § 1.63(d)).

() Incorporation by Reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated herein by reference.

() Signed Statement Deleting Inventor(s) Named in the Prior Application. (37 CFR § 163(d)(2)).

() Power of Attorney.

(X) Return Receipt Postcard.

() Associate Power of Attorney.

() A Check in the amount of \$ _____ for the Filing Fee.

() Preliminary Amendment.

(X) Information Disclosure Statement and Form PTO-1449.

() A Duplicate Copy of this Form for Processing Fee Against Deposit Account.

() A Certified Copy of Priority Documents (if foreign priority is claimed).

() Statement(s) of Status as a Small Entity.

() Statement(s) of Status as a Small Entity Filed in Prior Application, Status Still Proper and Desired.

() Other: _____

CLAIMS AS FILED

FOR	NO. FILED	NO. EXTRA	RATE	FEE
Total Claims	27	7	\$18.00	\$ 126.00
Independent Claims	6	3	\$78.00	\$ 234.00
Multiple Dependent Claims (if applicable)				\$0.00
Assignment Recording Fee				\$0.00
Basic Filing Fee				\$760.00
Total Filing Fee				\$1,120.00

Charge \$ _____ to Deposit Account _____ pursuant to 37 CFR § 1.25. At any time during the pendency of this application, please charge any fees required or credit any overpayment to this Deposit Account.

Respectfully submitted,

By: _____

Michael A. Dryja, Attorney of Record, Reg. No. 39662

Date: 10/8/99

Correspondence Address:

Law Offices of Michael Dryja
704 228th Avenue NE PMB 694
Redmond, WA 98053
Phone: 425-427-5094
Fax: 206-374-2819

I hereby certify that this is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated below and is addressed to:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

By: _____

Typed Name: Michael A. Dryja

Express Mail Label No.: EJ243665462US

Date of Deposit: 10/8/99

JC675 U.S. PTO
09/415901
10/08/99

FAIR SCHEDULING IN BROADCAST ENVIRONMENTS

FIELD OF THE INVENTION

This invention relates generally to broadcast environments such as wired and
5 wireless networks, multi-hop networks, etc., and more particularly to fair scheduling for
data transmission within such environments.

BACKGROUND OF THE INVENTION

Broadcast environments include environments in which information is transmitted
10 from discrete originating points over a common medium, and include environments such
as networking environments, which have become increasingly common. Networking
means that two or more computers or computerized devices, referred to generically as
nodes, are communicatively coupled together, so that they can exchange data, typically in
the form of packets of data. Networking includes wired local-area-networks (LAN's), in
15 which nodes are connected physically over relatively short distances, wireless LAN's, in
which nodes communicate wirelessly over relatively short distances, and multi-hop
networks, in which nodes communicate with other nodes on the network, using
intermediate nodes to forward their messages..

The amount of data that a network can handle at a given moment in time is
20 referred to as bandwidth. For example, the commonly known Ethernet network generally
comes in two different speeds: 100 megabits-per-second (mbps) and 10 megabits-per-
second (mbps). This means that, per second, the network is able to accommodate either
100 megabits or 10 megabits of data.

An issue in broadcast environments, such as the ones described above, is determining which node gets to communicate at a given time. Algorithms and schemes to determine which node gets to communicate at a given time typically also concern themselves with fairness. Fairness can be defined in different ways. For example,

5 fairness can mean that each node on the network has a predetermined percentage of the available bandwidth on the network over a given duration of time, a predetermined priority relative to the other nodes on the network, or a weight to divide the available network bandwidth relative to the other nodes. In addition, fairness can mean that a predefined Quality of Service (QOS) is guaranteed for one or more given nodes on the
10 network. A non-restrictive example of QOS is that a given node is guaranteed to receive x amount of bandwidth within y amount of time after the node requests to transmit data over the network.

Within the prior art, fairness has generally been implemented by randomizing the time at which different nodes compete for the broadcast channel to transmit their data.

15 The theory is that by randomizing the time, the nodes on the network will pick generally different times to transmit and consequently each will get a chance to transmit its data.

While such randomization techniques improve the probability that, over a long period of time, every node gets an opportunity to use the channel, they generally result in poor performance when nodes have to transmit time-constrained data, such as voice and

20 video. For this and other reasons, there is a need for the present invention

SUMMARY OF THE INVENTION

The invention relates to fair scheduling in broadcast environments. In one embodiment, a computerized system includes a link through which packets, such as packets of data, are transmitted, and a plurality of nodes, such as computers or
5 computerized devices in a wireless or wired local-area network (LAN) or multi-hop network configuration. Each node is able to transmit a packet through the link when it has counted down its back-off interval to a predetermined transmission time, such as zero. The back-off interval for each packet is based on at least a start tag of the packet, which is assigned to the packet when it arrives at or within the node for transmission over
10 the link, such as at a controller (e.g., a medium-access controller, or MAC) within the node, from, for example, an application computer program or programs within the node.

Embodiments of the invention provide for advantages not found within the prior art. The tagging of packets with start tags upon their arrival at or within the node and subsequently using these tags to schedule transmission over the link provides for fair
15 scheduling among the nodes. Such fair scheduling means that each node will eventually have its turn to transmit information over the link. Furthermore, the use of appropriate back-off interval means that a certain level of Quality of Service (QOS) can be provided to one or more of the nodes on the network.

The invention includes computer-implemented methods, machine-readable media,
20 computerized systems, and computers of varying scopes. Other aspects, embodiments and advantages of the invention, beyond those described here, will become apparent by reading the detailed description and with reference to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram of an operating environment in conjunction with which
embodiments of the invention can be practiced;

FIGs. 2(a)-2(c) are diagrams of example broadcast environments in conjunction
5 with which embodiments of the invention can be practiced;

FIG. 3 is a diagram of an abstraction of a broadcast environment, according to an
embodiment of the invention;

FIG. 4 is a flowchart of a method according to an embodiment of the invention;
and,

10 FIG. 5 is a diagram of a computer according to an embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

In the following detailed description of exemplary embodiments of the invention,
reference is made to the accompanying drawings which form a part hereof, and in which
15 is shown by way of illustration specific exemplary embodiments in which the invention
may be practiced. These embodiments are described in sufficient detail to enable those
skilled in the art to practice the invention, and it is to be understood that other
embodiments may be utilized and that logical, mechanical, electrical and other changes
may be made without departing from the spirit or scope of the present invention. The
20 following detailed description is, therefore, not to be taken in a limiting sense, and the
scope of the present invention is defined only by the appended claims.

Some portions of the detailed descriptions which follow are presented in terms of
algorithms and symbolic representations of operations on data bits within a computer

memory. These algorithmic descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. An algorithm is here, and generally, conceived to be a self-consistent sequence of steps leading to a desired result. The steps are those requiring
5 physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated.

It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the
10 like. It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussions, it is appreciated that throughout the present invention, discussions utilizing terms such as processing or computing or calculating or determining or
15 displaying or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

Operating Environment

Referring to FIG. 1, a diagram of the hardware and operating environment in conjunction with which embodiments of the invention may be practiced is shown. The description of FIG. 1 is intended to provide a brief, general description of suitable computer hardware and a suitable computing environment in conjunction with which the invention may be implemented. Although not required, the invention is described in the general context of computer-executable instructions, such as program modules, being executed by a computer, such as a personal computer. Generally, program modules include routines, programs, objects, components, data structures, etc., that perform particular tasks or implement particular abstract data types.

Moreover, those skilled in the art will appreciate that the invention may be practiced with other computer system configurations, including hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, network PC's, minicomputers, mainframe computers, and the like. The invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

The exemplary hardware and operating environment of FIG. 1 for implementing the invention includes a general purpose computing device in the form of a computer 20, including a processing unit 21, a system memory 22, and a system bus 23 that operatively couples various system components including the system memory to the processing unit 21. There may be only one or there may be more than one processing unit 21, such that

the processor of computer 20 comprises a single central-processing unit (CPU), or a plurality of processing units, commonly referred to as a parallel processing environment. The computer 20 may be a conventional computer, a distributed computer, or any other type of computer; the invention is not so limited.

5 The system bus 23 may be any of several types of bus structures including a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. The system memory may also be referred to as simply the memory, and includes read only memory (ROM) 24 and random access memory (RAM) 25. A basic input/output system (BIOS) 26, containing the basic routines that help to
10 transfer information between elements within the computer 20, such as during start-up, is stored in ROM 24. The computer 20 further includes a hard disk drive 27 for reading from and writing to a hard disk, not shown, a magnetic disk drive 28 for reading from or writing to a removable magnetic disk 29, and an optical disk drive 30 for reading from or writing to a removable optical disk 31 such as a CD ROM or other optical media.

15 The hard disk drive 27, magnetic disk drive 28, and optical disk drive 30 are connected to the system bus 23 by a hard disk drive interface 32, a magnetic disk drive interface 33, and an optical disk drive interface 34, respectively. The drives and their associated computer-readable media provide nonvolatile storage of computer-readable instructions, data structures, program modules and other data for the computer 20. It
20 should be appreciated by those skilled in the art that any type of computer-readable media which can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridges, random access memories

(RAMs), read only memories (ROMs), and the like, may be used in the exemplary operating environment.

A number of program modules may be stored on the hard disk, magnetic disk 29, optical disk 31, ROM 24, or RAM 25, including an operating system 35, one or more application programs 36, other program modules 37, and program data 38. A user may enter commands and information into the personal computer 20 through input devices such as a keyboard 40 and pointing device 42. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit 21 through a serial port interface 46 that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, game port, or a universal serial bus (USB). A monitor 47 or other type of display device is also connected to the system bus 23 via an interface, such as a video adapter 48. In addition to the monitor, computers typically include other peripheral output devices (not shown), such as speakers and printers.

The computer 20 may operate in a networked environment using logical connections to one or more remote computers, such as remote computer 49. These logical connections are achieved by a communication device coupled to or a part of the computer 20; the invention is not limited to a particular type of communications device. The remote computer 49 may be another computer, a server, a router, a network PC, a client, a peer device or other common network node, and typically includes many or all of the elements described above relative to the computer 20, although only a memory storage device 50 has been illustrated in FIG. 1. The logical connections depicted in FIG. 1 include a local-area network (LAN) 51 and a wide-area network (WAN) 52. Such

networking environments are commonplace in office networks, enterprise-wide computer networks, intranets and the Internet, which are all types of networks.

When used in a LAN-networking environment, the computer 20 is connected to the local network 51 through a network interface or adapter 53, which is one type of communications device. When used in a WAN-networking environment, the computer 20 typically includes a modem 54, a type of communications device, or any other type of communications device for establishing communications over the wide area network 52, such as the Internet. The modem 54, which may be internal or external, is connected to the system bus 23 via the serial port interface 46. In a networked environment, program modules depicted relative to the personal computer 20, or portions thereof, may be stored in the remote memory storage device. It is appreciated that the network connections shown are exemplary and other means of and communications devices for establishing a communications link between the computers may be used.

Broadcast Environments

In this section of the detailed description, representative broadcast environments, in conjunction with which embodiments of the invention can be practiced, are described. However, those of ordinary skill within the art can appreciate that the invention is not limited to any particular broadcast environment or the set of broadcast environments described herein. Specifically, three example broadcast environments are described: a wired local-area network (LAN), a wireless LAN, and a wireless, multi-hop network.

Referring first to FIG. 2(a), a diagram of a wired LAN is shown. The LAN 208 includes nodes 200, 202, 204 and 206. The nodes are connected to one another in a

physical manner. For example, cables can connect the nodes to one another. The LAN 208 has the characteristic that any node is able to communicate with any other node in the network in a direct manner. Example nodes include computers, such as that described in the previous section of the detailed description, as well as computerized devices, such as cell phones, personal digital assistant (PDA) devices, etc.; the invention is not so limited.

Referring next to FIG. 2(b), a diagram of a wireless LAN is shown. Similar to the LAN 208 of FIG. 2(a), the LAN 218 includes nodes 210, 212, 214 and 216. However, in the diagram of FIG. 2(b), the nodes communicate with one another in a wireless manner.

For example, each node can include a transceiver such that the node is able to send information over a radio frequency (RF), such as the commonly used 2.4 GHz frequency, although the invention is not so limited. The LAN 218 also has the characteristic that any node is able to communicate with any other node in the network in a direct manner.

Example nodes include computers, such as that described in the previous section of the detailed description, as well as computerized devices, such as cell phones, personal digital assistant (PDA) devices, etc.; the invention is not so limited.

Referring next to FIG. 2(c), a diagram of a wireless multi-hop network is shown. The network 230 includes nodes 220, 222, 224, 226 and 228. The nodes communicate with one another in a wireless manner, such as that described in the previous paragraph in conjunction with the description of a wireless LAN. It is noted, however, in the network of FIG. 2(c), that not each node is able to communicate directly with every other node, which is the defining characteristic of a multi-hop network. For example, the node 222 is able to communicate directly with nodes 220 and 224, but not with nodes 226 and 228. Rather, communication between the node 222 and the nodes 226 and 228 must “hop”

through node 224. This may be because, for example in the case of wireless communication among the nodes, the node 222 has sufficient communicative range to reach nodes 220 and 224, but not nodes 226 and 228. Example nodes, as before, include computers, such as that described in the previous section of the detailed description, as well as computerized devices, such as cell phones, personal digital assistant (PDA) devices, etc.; the invention is not so limited.

Referring finally to FIG. 3, a diagram of an abstraction of a broadcast environment, such as the broadcast environment of FIG. 2(a), or FIG. 2(b), is shown. In the example, there are flows 304a, 304b, . . . , 304n, which correspond to the nodes of FIG. 2(a), or 2(b). The link 300 corresponds to the network of FIG. 2(a), or 2(b). The abstraction of FIG. 3 is useful because it shows that when a node, that is, a flow, wishes to transmit a packet of data over a network, that is, a link, the link is commonly shared among all the nodes or flows. Thus, a scheme must be put into place such that all the nodes do not attempt to send packets of data at the same time, else a collision may occur. As described in the background and summary sections, however, the scheme is desirably such that some definition of fairness is achieved as to dividing the bandwidth of the link over the various flows that wish to send data packets thereover.

Method

In this section of the detailed description, a method for distributed fair scheduling of packet transmission among nodes within a network, according to one embodiment of the invention, is described. The method described is distributed in that the method achieves fair scheduling and Quality of Service (QOS) without having a central management node, or other central managing mechanism, coordinating data transmission

among the various nodes of the network. As described herein, the method is performed on each node of a network that desires to send packets, such as of data, over the network, as can be abstracted as a link, as described in the previous section of the detailed description. The method achieves scheduling fairness and QOS, while reducing the occurrence of collisions, defined generally as two or more nodes attempting to transmit data over the network at the same time.

The computer-implemented method is desirably realized at least in part as one or more programs running on a computer -- that is, as a program executed from a computer-readable medium such as a memory by a processor of a computer. The programs are desirably storable on a machine-readable medium such as a floppy disk or a CD-ROM, for distribution and installation and execution on another computer. The program or programs can be a part of a computer system or a computer, such as that described in conjunction with FIG. 1 in a previous section of the detailed description. The invention is not so limited, however.

Referring now to FIG. 4, a flowchart of a method according to an embodiment of the invention is shown. The method is performed by each node within a broadcast environment. In 400, a packet, for example, a packet of data, is received at the node for transmission therefrom, through the link or network coupling all the nodes, or from an applications running on the node. In 402, a virtual clock is reset to zero. The virtual clock is a clock maintained by each node within the network. It is reset only once. The virtual clock is written as $v_i(t)$, where t is actual, physical time -- for example, as maintained by a real-time clock within the node -- and i specifies the node. Thus, the resetting of the virtual clock to zero in 402 is written as $v_i(t) = 0$.

In 404, the packet is tagged with a start tag. The start tag is a function of the time when the packet arrives at the node. . The packet itself is denoted as P_i^k , where P is the packet, i indicates the node, and k indicates the k -th packet received at the node. The start tag is specified as S_i^k and determined as

$$S_i^k = \max\{v(A_i^k), F_i^{k-1}\},$$

where A_i^k specifies the real time at which packet P_i^k arrives at node i , and F_i^{k-1} specifies the finish tag of the previous packet. A finish tag of the packet indicates when the packet was transmitted from the node onto the link or the network. The finish tag of a packet is determined as

$$F_i^k = S_i^k + \gamma \frac{L_i^k}{w_i},$$

where L_i^k specifies the length of the packet and w_i specifies weight of node i , higher weight is given to nodes that require a greater share of the bandwidth. γ is the scaling factor used to allow a choice of the scale for the virtual clock.

In 406, the virtual clock is updated. It is noted that the virtual clock is updated only when a packet is transmitted from a node onto the link. Thus, if at time t , a packet is in service, then $v_i(t)$ is updated to

$$v_i(t) = \max(v_i(t), s)$$

where s is the start tag of the packet in service. It is noted that the virtual clock is not updated at any other time in one embodiment.

Once a node i desires to transmit the packet, then in 408, it determines an appropriate back-off interval, which is generally defined as the length of time the node

waits until actually transmitting the packet onto the link. This interval is denoted as B_i , and is based on the start tag and the current virtual time $v_i(t)$ in one embodiment.

Specifically,

$$B_i = \lceil \eta^* (S_i^k - v_i(t)) \rceil$$

5 where η , the *Backoff_Multiplier* is a constant in one embodiment.

It is noted that because of the manner in which the start tags and the virtual clock are determined, B_i is non-negative. However, if the start tag and the virtual clock are identical, B_i may become equal to zero. To avoid this, in one embodiment, B_i is further modified as

10
$$B_i = B_i + X ,$$

where X is uniformly distributed in $[1, \beta]$ where β , the *Backoff_Window* is a positive integer. This further reduces the probability of back-off intervals of two nodes counting down to zero at the same time. , In 408 as well the *back-off counter* is reset to zero after this step is performed,.

15 The node then starts counting from the back-off interval to a predetermined transmission time, such as zero, in 410; that is, the node does not actually send the packet until the predetermined transmission time is reached in 410, as counted down from the back-off interval. Thus, in 412, the node has counted down from the back-off interval to the predetermined transmission time, and therefore transmits the packet over the network
20 or link. At this time, the node also tags the packet with a finish tag, as determined as has been described.

In 414, it listens to determine whether another node has sent a packet at exactly the same time, such that a collision resulted. If not, then the method is done in 416. It is

noted that in this case, when another packet needs transmission via the method of FIG. 4, that the virtual clock will not be reset in 402, since it is only reset once. However, if a collision has resulted, then a new *back-off interval* (B_i) must be determined, and the packet ultimately resent. Thus, the method goes back to 408. However, in this iteration
5 of 408, the *back-off counter* is increased by one, to indicate that the *back-off interval* (B_i) has already been determined once, and a new back-off interval is selected, uniformly distributed in

$$\left[1, 2^{\text{backoff_counter}-1} * \beta\right],$$

This new determination of the back-off interval is used if future iterations are necessary –
10 that is, if any more collisions result.

It is noted that this back-off interval is small. This is done to increase the probability that a colliding node “wins” the back-off interval countdown as against the other nodes, so that a collision does not result in unduly delaying the transmission of the packet. However, to minimize the occurrence of too many collisions, the range for B_i
15 increases exponentially with the number of collisions.

It is noted that the specific determination of the back-off interval for a node is not limited to the description above. Other variations are possible, in particular, to trade off between the probability that a collision may occur, and the overhead incurred by the choice of large back-off intervals. In varying embodiments, two alternatives are
20 determining the back-off interval can be used:

- 1) Initially selecting a back-off interval to be linearly proportional to (*start tag* minus *virtual time*). In one embodiment, a random component is added to this value. For example, the back-off interval is selected to be uniformly distributed within 20% of (*start tag* minus

virtual time). Such an approach is advantageous when the likelihood of many nodes choosing the same back-off interval is large.

- 2) As described in 1), once the back-off interval is chosen, it is decremented until it reaches the predetermined transmission time, in one embodiment, zero. A new back-off interval is not selected for a packet unless a collision occurs when its back-off interval reaches the predetermined transmission time. This approach works because the back-off interval is chosen to be linearly proportional to (*start tag* minus *virtual time*). However, where there are many nodes, there can be a case where all nodes choose large back-off intervals, such that too much time is spent idling when the back-off counters are decrementing to the predetermined transmission time. Thus, another alternative is to use a non-linear function to set the back-off interval, but emulate the relative order of back-off intervals chosen in 1). For example, a function of the form $K_1 * (1 - K_2^{(start_tag - virtual_time)})$ is used in one embodiment. In this case, however, after each packet transmission, the back-off counter of each pending packet needs to be redetermined, so as to emulate the scheme in 1).

The method of FIG. 4 can be summarized as follows. Each node of the network may have a pending packet to be transmitted over the network. For each node that does, when the packet actually arrived at the node – for example, when the packet was generated within the node, and then “arrived” at the node for transmission by a medium access controller (MAC) of the node – the packet is stamped with a start tag, and a back-off interval is determined for the node. The nodes thus start counting down from their respective back-off intervals to zero, in one embodiment. The first node that “wins” – the first node that counts down to zero – sends its packet. This node then is able to receive another packet, and the process starts over for that node. Thus, as nodes count down to zero, they fire off their packets. The method also takes care of the situation where more than one node count down to zero at the same time, which results in a collision.

The method of FIG. 4, as one embodiment of the invention, thus provides for fair scheduling within broadcast environments.

Computer

In this section of the detailed description, a computer is described that can function as a node within a network per the method of the preceding section of the detailed description. The computer can be based on, in one embodiment, the computer of FIG. 1, as has been described. However, the invention is not so limited.

Referring now to FIG. 5, the computer includes application programs such as programs 500, 502 and 504. Each of these programs generates data packets, as represented by 506 in the diagram of FIG. 5. The packets are received at, or within, the computer specifically at the controller 508, which can be described in one embodiment as a medium access controller (MAC) – the controller which controls access to the “medium,” which in this case is the network, or link. Thus, the method described in the preceding section of the detailed description is performed within the controller 508, to determine when to send a received packet to the link, as represented in FIG. 5 by 510.

Not shown in FIG. 5 is that generally there is a queue to receive packets from the application programs. In such an embodiment, a packet is received by the controller 508 from the queue, in a first in-first out (FIFO) basis, when the controller has finished transmitting a previous packet. When the queue is completely empty, the packet immediately is received by the controller 508.

Conclusion

Although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that any arrangement which is

calculated to achieve the same purpose may be substituted for the specific embodiments shown. This application is intended to cover any adaptations or variations of the present invention. Therefore, it is manifestly intended that this invention be limited only by the following claims and equivalents thereof.

5

We claim:

1. A computer-implemented method for distributed fair scheduling comprising:

tagging a packet with a start tag;

determining a back-off interval based on at least the start tag of the packet;

5 counting from the back-off interval to a predetermined transmission time; and,

transmitting the packet upon counting from the back-off interval to the predetermined transmission time.

2. The method of claim 1, further comprising:

determining whether a collision occurred between the packet and another packet; and,

10 upon determining that a collision occurred, determining a new back-off interval, and

transmitting the packet upon counting from the new back-off interval to the new predetermined transmission time.

3. The method of claim 1, further initially comprising receiving the packet at a node for transmission therefrom.

15 4. The method of claim 1, further initially comprising resetting a virtual clock.

5. The method of claim 4, further comprising updating the virtual clock to the start tag of the packet upon determining that the start tag exceeds the virtual clock.

6. The method of claim 4, wherein determining a back-off interval comprises determining the back-off interval based on also the virtual clock.

7. The method of claim 1, wherein tagging a packet with a start tag comprises determining the start tag as greater of a virtual clock and a finish tag of a previous packet.

5 8. The method of claim 1, wherein the predetermined transmission time comprises zero.

9. A computer-implemented method for distributed fair scheduling comprising:

tagging a packet with a start tag set as greater of a virtual clock and a finish tag of a previous packet;

10 determining a back-off interval based on at least the virtual clock and the start tag of the packet;

counting from the back-off interval to a predetermined transmission time; and,

transmitting the packet upon counting from the back-off interval to the predetermined transmission time.

10. The method of claim 9, further comprising:

15 determining whether a collision occurred between the packet and another packet; and,

upon determining that a collision occurred, determining a new back-off interval, and transmitting the packet upon counting from the new back-off interval to the new predetermined transmission time.

11. The method of claim 9, further comprising updating the virtual clock to the start tag of the packet upon determining that the start tag exceeds the virtual clock.

12. A computerized system comprising:

a link through which packets are transmitted; and,

5 a plurality of nodes, each node transmitting a packet through the link when a counting from a back-off interval for the packet reaches a predetermined transmission time,

wherein the back-off interval for each packet is based on a start tag of the packet and a virtual clock maintained by the node of the packet.

13. The system of claim 12, wherein each node comprises a controller at which the

10 packet for the node is received for transmission through the link.

14. The system of claim 12, wherein the predetermined transmission time comprises zero.

15. A computer comprising:

at least one application generating one or more packets for transmission through a link operatively coupled to the computer; and,

15 a controller to receive each packet as generated by the at least one application, and to transmit each packet through the link when a counting from a back-off interval reaches a predetermined transmission time,

wherein the back-off interval for each packet is based on a start tag of the packet and a virtual clock maintained by the controller.

16. The computer of claim 15, wherein the predetermined transmission time comprises zero.

17. A machine-readable medium having instructions stored thereon for execution by a processor to perform a method comprising:

- 5 tagging a packet with a start tag;
 determining a back-off interval based on at least the start tag of the packet;
 counting from the back-off interval to a predetermined transmission time; and,
 transmitting the packet upon counting from the back-off interval to the predetermined transmission time.

- 10 18. The medium of claim 17, wherein the method further comprises:
 determining whether a collision occurred between the packet and another packet; and,
 upon determining that a collision occurred, determining a new back-off interval, and
 transmitting the packet upon counting from the new back-off interval to the new predetermined transmission time.

- 15 19. The medium of claim 17, wherein the method further initially comprises receiving the packet at a node for transmission therefrom.

20. The medium of claim 17, wherein the method further initially comprises resetting a virtual clock.

21. The medium of claim 20, wherein the method further comprises updating the virtual clock to the start tag of the packet upon determining that the start tag exceeds the virtual clock.

22. The medium of claim 20, wherein determining a back-off interval comprises

5 determining the back-off interval based on also the virtual clock.

23. The medium of claim 17, wherein tagging a packet with a start tag comprises determining the start tag as greater of a virtual clock and a finish tag of a previous packet.

24. The medium of claim 17, wherein the predetermined transmission time comprises zero.

10 25. A machine-readable medium having instructions stored thereon for execution by a processor to perform a method comprising:

tagging a packet with a start tag set as greater of a virtual clock and a finish tag of a previous packet;

determining a back-off interval based on at least the virtual clock and the start tag of

15 the packet;

counting from the back-off interval to a predetermined transmission time; and,

transmitting the packet upon counting from the back-off interval to the predetermined transmission time.

26. The medium of claim 25, wherein the method further comprises:

determining whether a collision occurred between the packet and another packet; and,

upon determining that a collision occurred, determining a new back-off interval, and

transmitting the packet upon counting from the new back-off interval to the new

5 predetermined transmission time.

27. The medium of claim 25, wherein the method further comprises updating the virtual

clock to the start tag of the packet upon determining that the start tag exceeds the virtual

clock.

ABSTRACT OF THE DISCLOSURE

Fair scheduling in broadcast environments is disclosed. In one embodiment, a computerized system includes a link through which packets are transmitted, and a plurality of nodes. Each node transmits a packet through the link when counting from a back-off interval reaches a predetermined transmission time. The back-off interval for each packet is based on at least a start tag of the packet, which is assigned to the packet when it arrives at or within the node for transmission over the link, such as at a controller (e.g., a medium-access controller, or MAC) of the node.

I hereby certify that this is being deposited in the
United States Postal Service "Express Mail Post
Office to addressee" service under 37 CFR 1.10 in
an envelope addressed to The Assistant
Commissioner for Patents, Washington, DC
20231 on. 10/8/99

date, by

printed name


signature

M. DIXON
M. Dixon

EJ24380546205

"express mail" mailing

FIG. 1

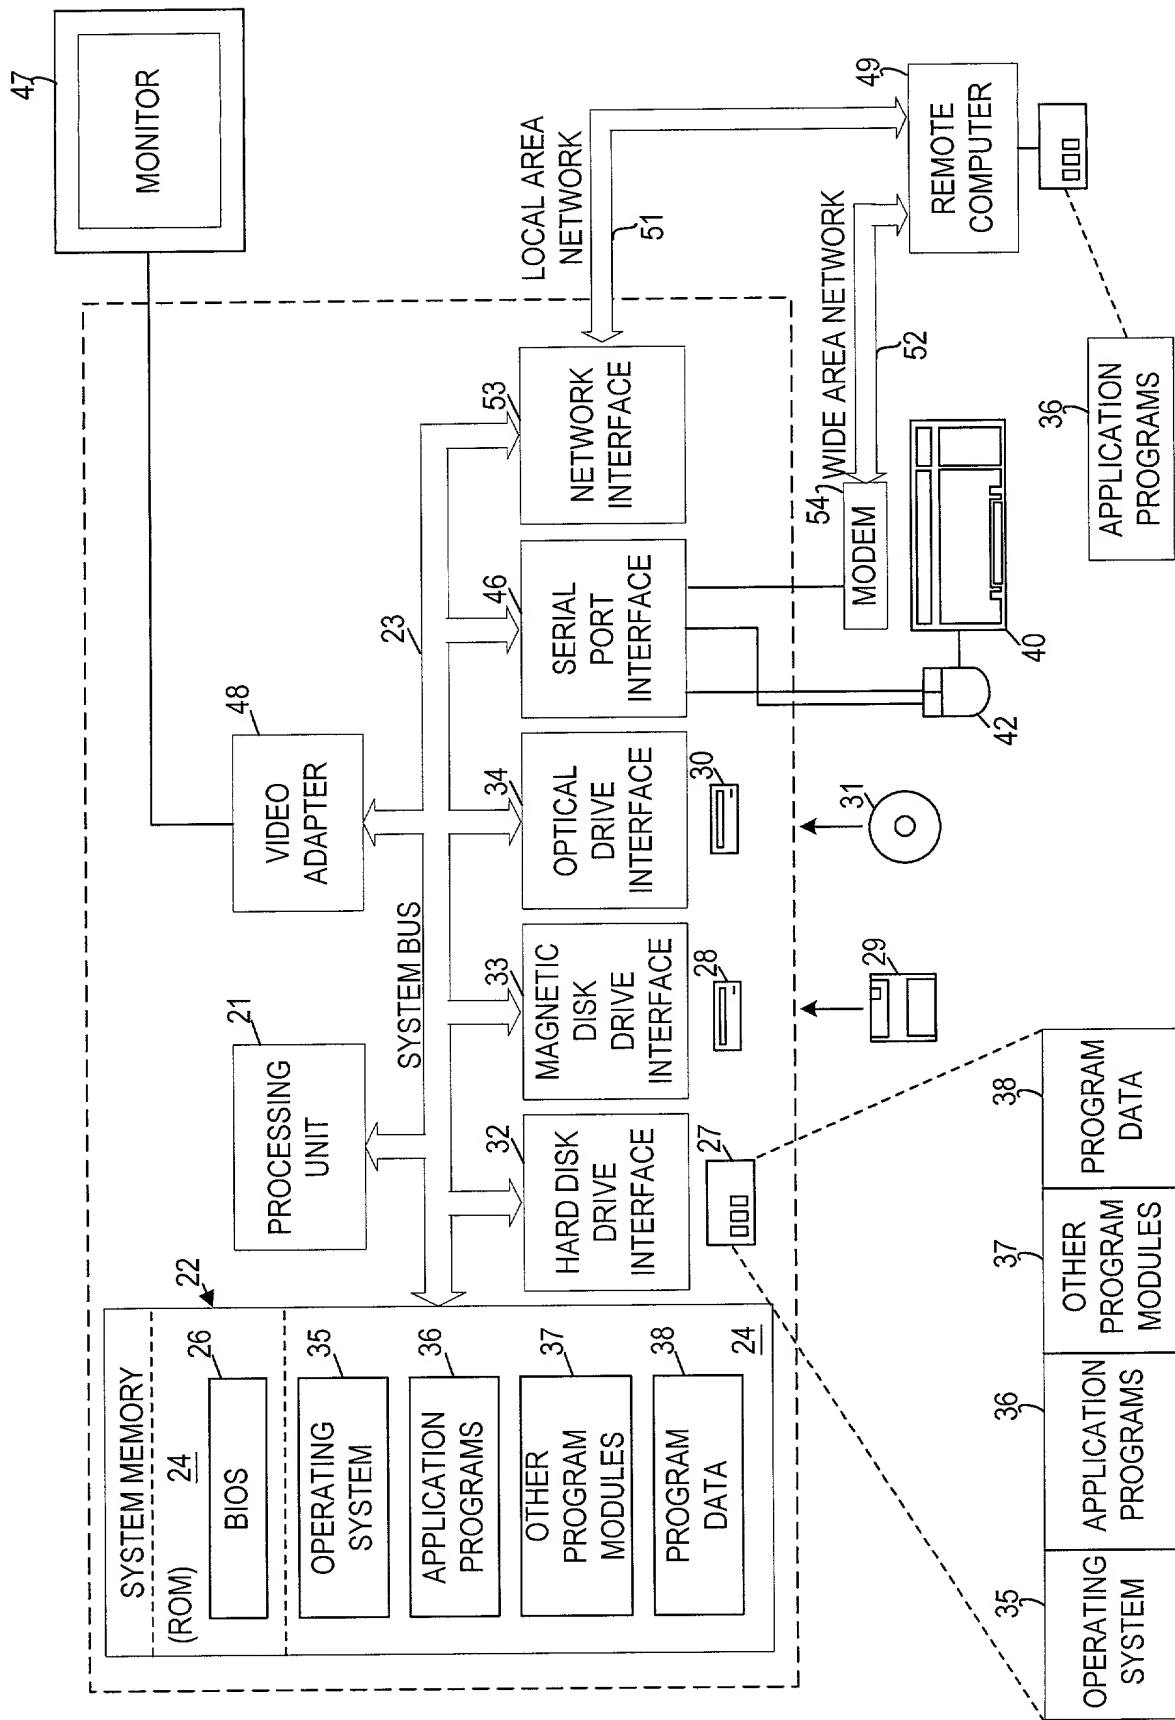

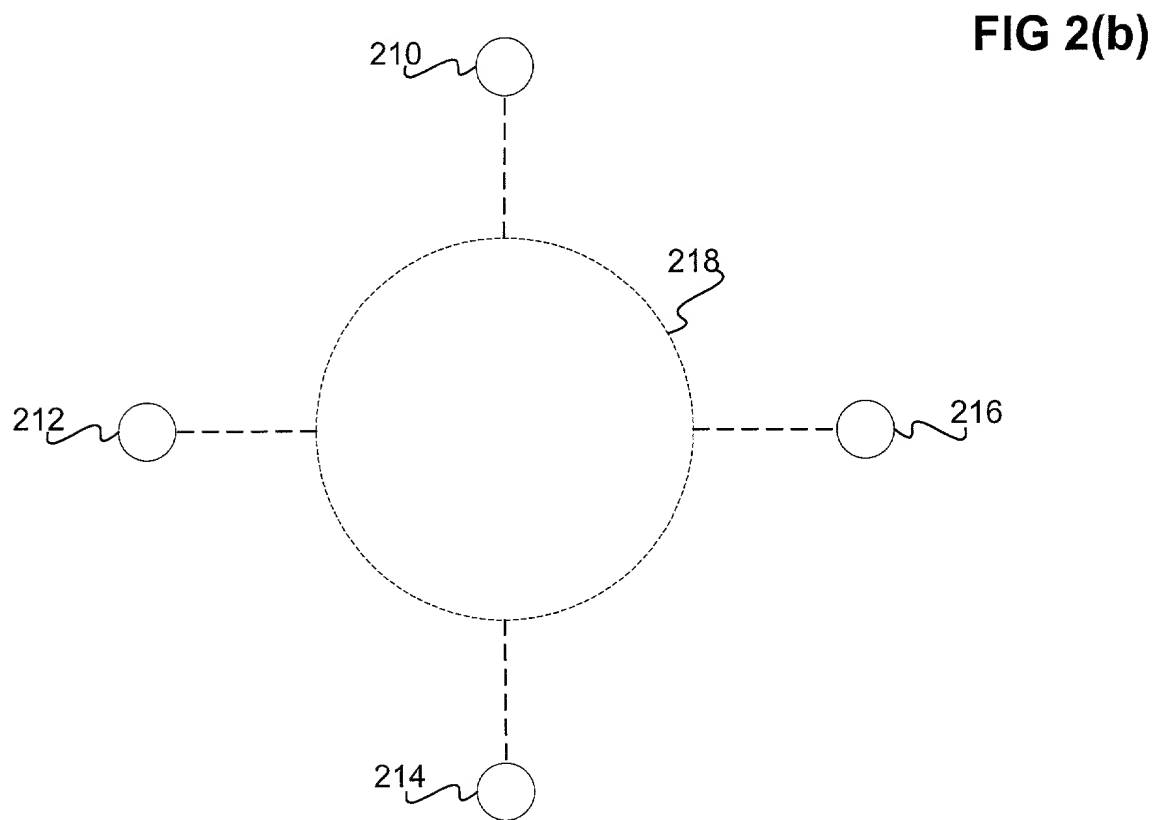
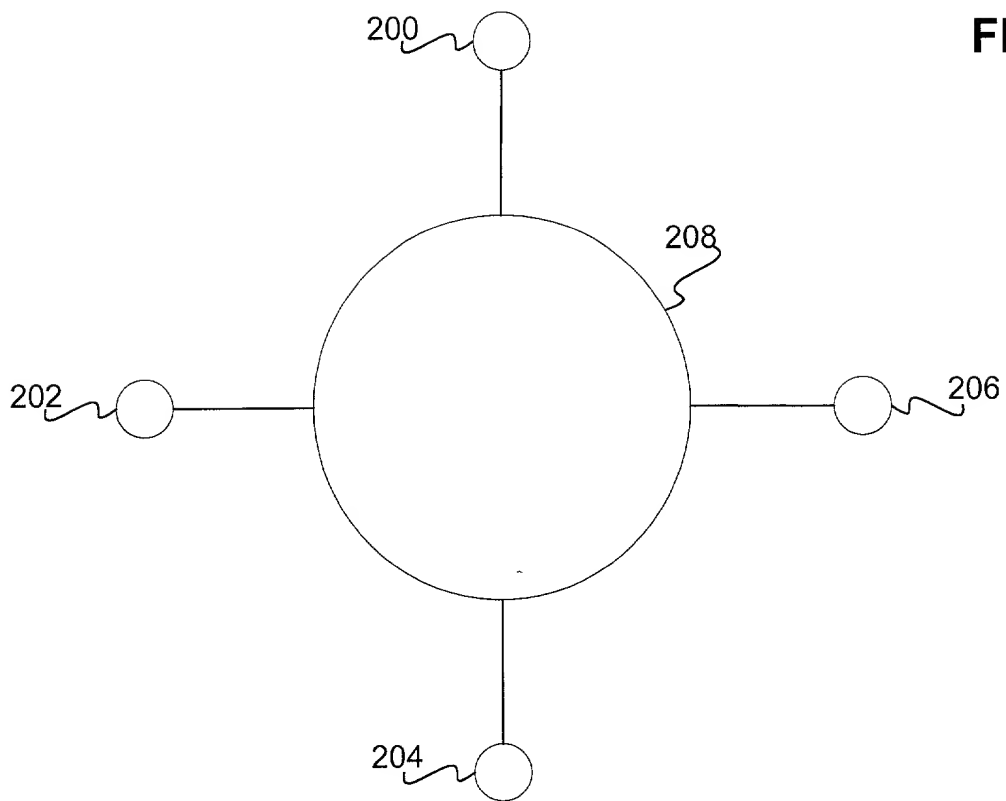


FIG 2(c)

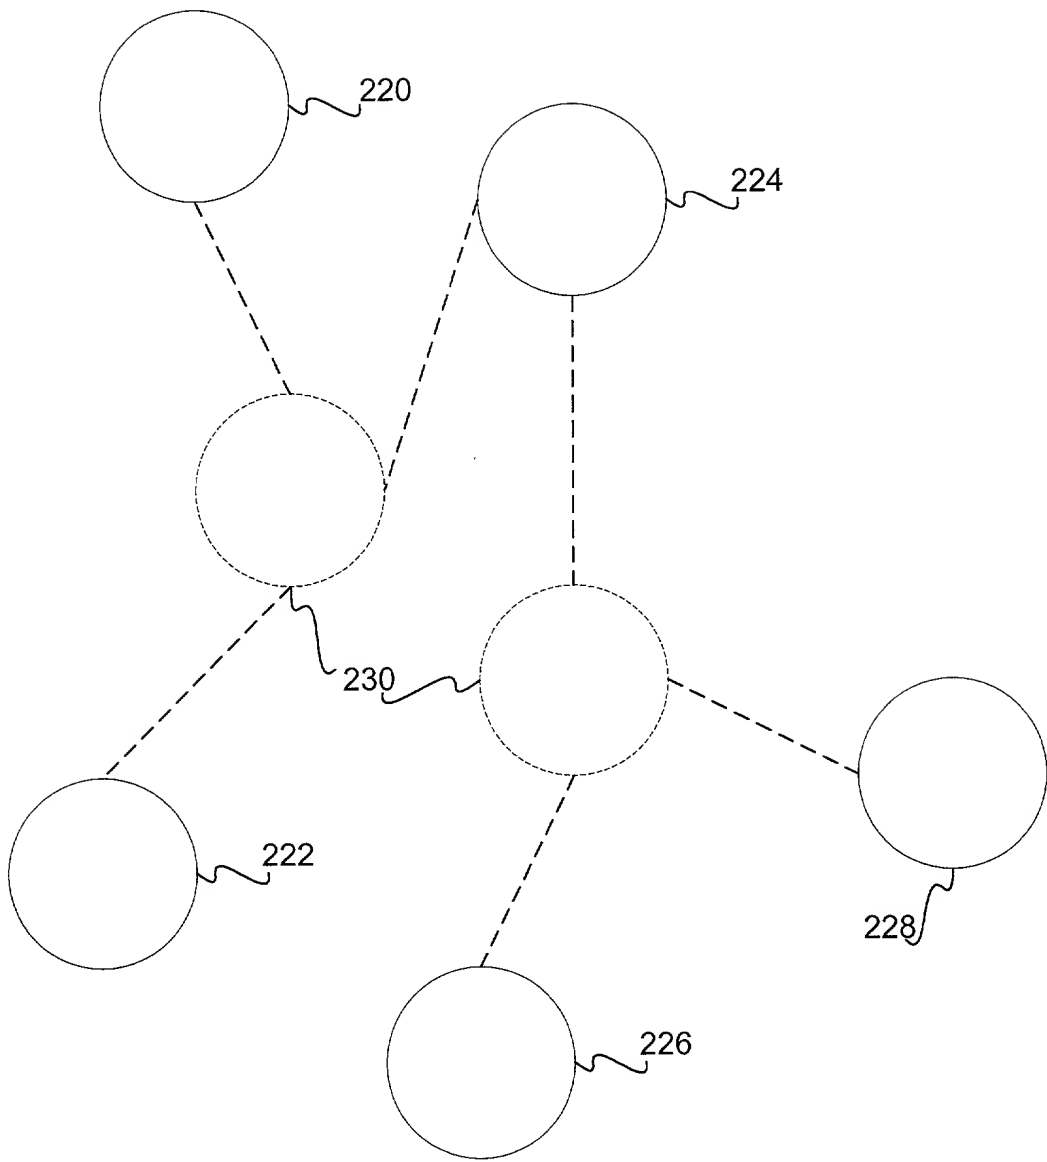


FIG 3

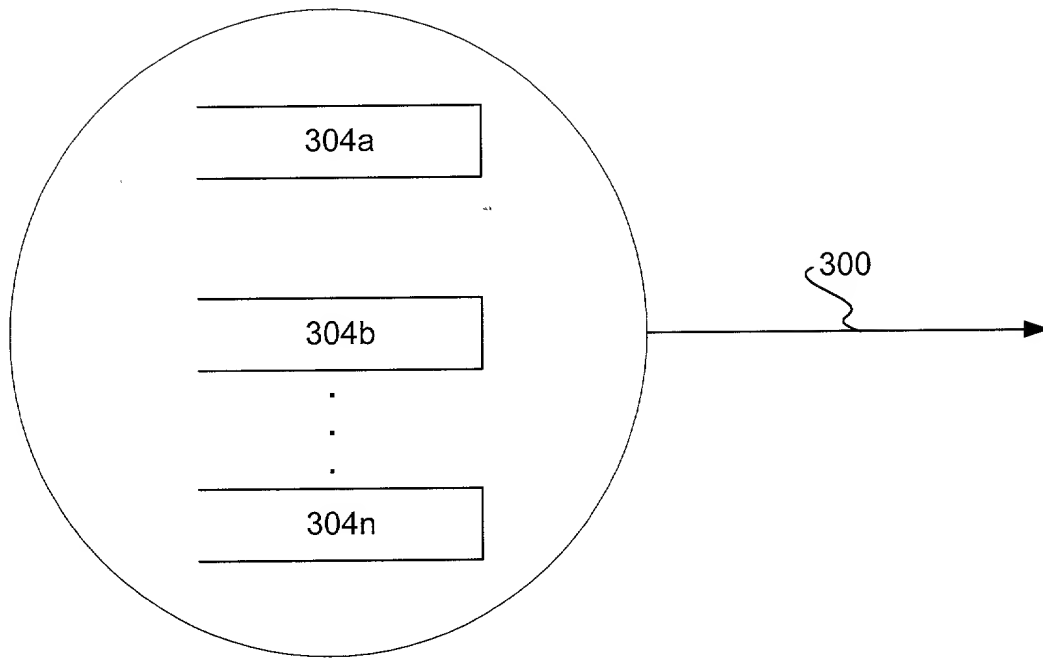


FIG 4


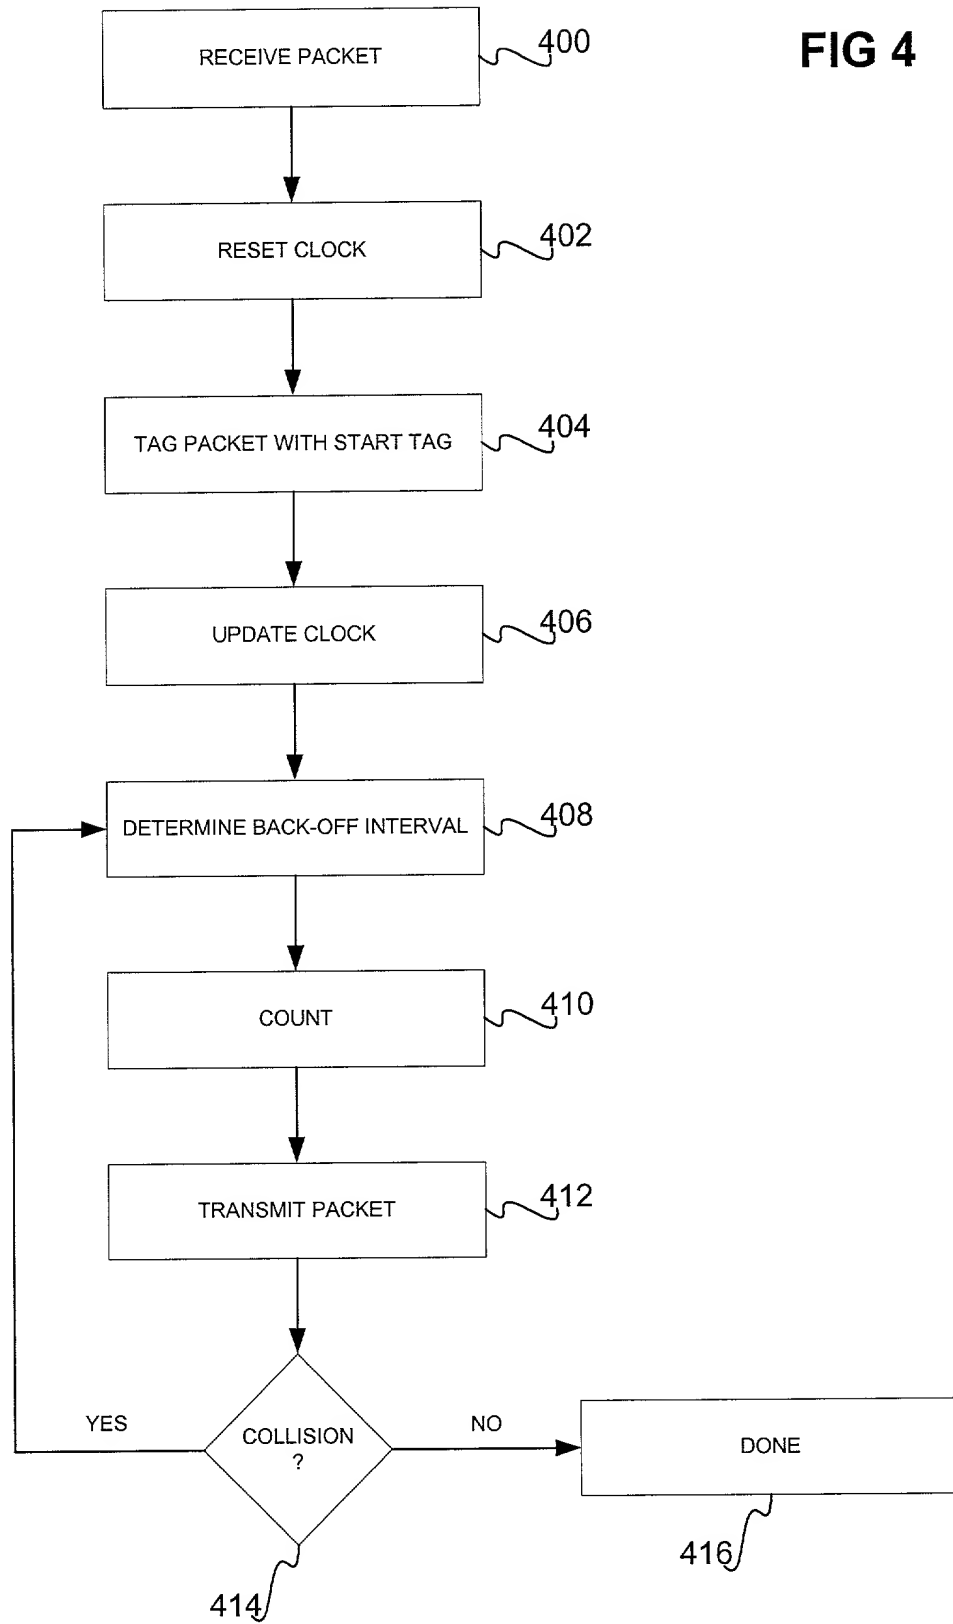


FIG 5

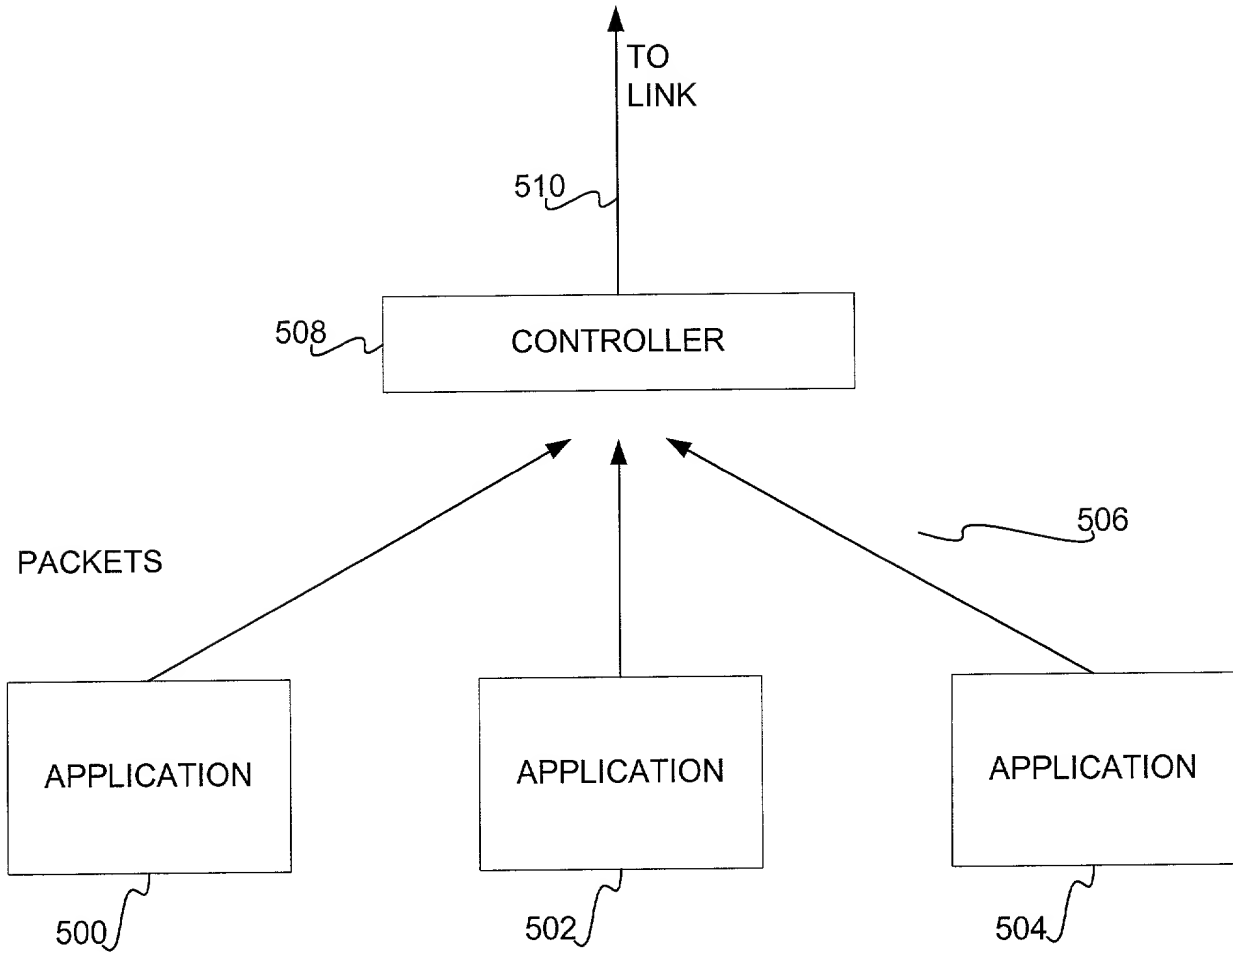

PATENT APPLICATION

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

ATTORNEY DOCKET NO. 1018.051US1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Fair Scheduling in Broadcast Environments

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as US Application Serial No. or PCT International Application
Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: ____ NO: ____
			YES: ____ NO: ____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS(patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) listed below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Michael A. Dryja, Reg. No. 39662

Katie E. Sako, Reg. No. 32628

Daniel D. Crouse, Reg. No. 32022

Send Correspondence to:	Direct Telephone Calls To:
Michael A. Dryja Law Offices of Michael Dryja 704 228th Avenue NE PMB 694 Redmond, WA 98053	Michael A. Dryja 425-427-5094

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Nitin Vaidya

Citizenship: Indian

Residence: One Microsoft Way, Redmond, WA 98053 USA

Post Office Address: Same

Inventor's Signature _____

Date _____

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION (continued)

ATTORNEY DOCKET NO. 1018.051US1

Full Name of Inventor: Paramvir Bahl

Citizenship: US

Residence: 2221 271st CT SE, Issaquah, WA 98029 USA

Post Office Address: Same

Inventor's Signature

Date

I hereby certify that this is being sent by
United States Postal Service "Express Mail Post
Office to addressee" service under 37 CFR 1.10 in
an envelope addressed to The Assistant
Commissioner for Patents, Washington, DC
20231 on. 10/8/99

date, by

M. Bahl

printed name

One of

signature

EE 743665 462 US

express mail mailing
date